


TAB100B


Series Self-sucking Water Pump

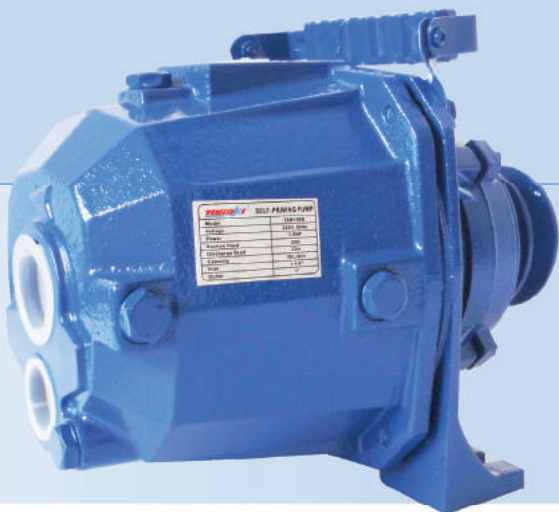

Construct

PUMP

- Pump Body: Cast Iron / Cast Iron with brass insert
- Impeller: Brass / Plastic with brass insert
- Mechanical Seal: Carbon / Ceramic / Stainless Steel

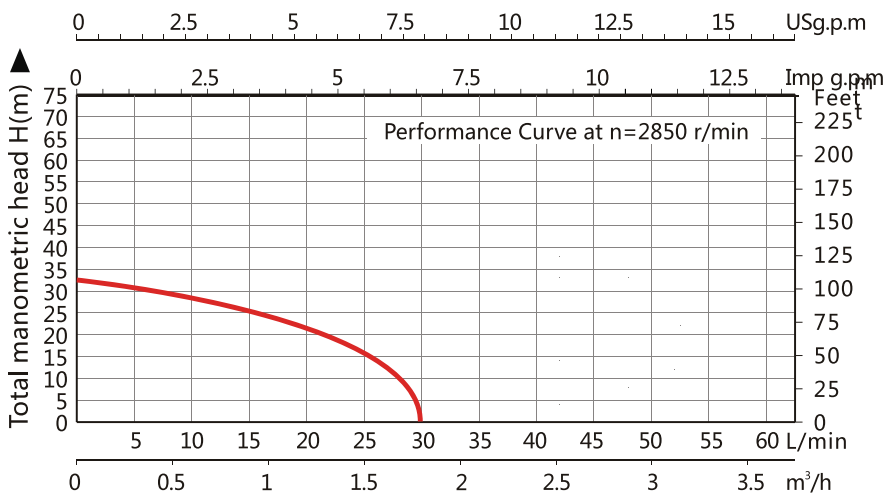

TAB 100B

Technical Data (220~240V/50HZ)

Model	Single-phase Motor				n=2850r/min			Q	US g.p.m	0	1.32	2.64	3.96	5.28	6.6	7.93	9.25	10.6	12	13	15	15.9
	Input max kW	Output Power		Current	Q.max	H.max	Suct.max		Imp g.p.m	0	1.1	2.2	3.3	4.4	5.5	6.6	7.7	8.8	9.9	11	12	13.2
									m/h	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3	3.3	3.6
									L/min	0	5	10	15	20	25	30	35	40	45	50	55	60
TAB 100B	-	-	1	-	-	-	-	H meter	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Other voltages and frequencies available on request.

Overall & Installation Dimensions

Model	DIMENSIONS(mm)																			PACKAGE DIMENSIONS & G.W.				
	DNA		DNM		a	a1	b	c	h	h1	h2	e	f	f1	g	h	i	k	l	m	A	B	H	kg
	Inch	mm	Inch	mm																				
TAB 100B	1-1/4"	25	1"	25	262	312	218	94	280	293	312	47.5	197	231	166	129	φ11	92	57	-	390	180	220	25.5

H

A
(mm)

B

