

TE50

Series Electric Clean Water Pump

Operating Conditions

- Liquid temperature up to 60°C
- Ambient temperature up to 40°C
- Total suction lift up to 9 m
- Continuous duty




PUMP


- Pump Body: Cast Iron
- Impeller: Brass
- Mechanical Seal: Carbon / Ceramic / Stainless Steel

MOTOR

- Single Phase
- Heavy Duty Continuous Work
- Motor Housing: Aluminum
- Shaft: Carbon Steel / Stainless Steel
- Insulation: Class B / Class F
- Protection: IP44 / IP54
- Cooling: External Ventilation

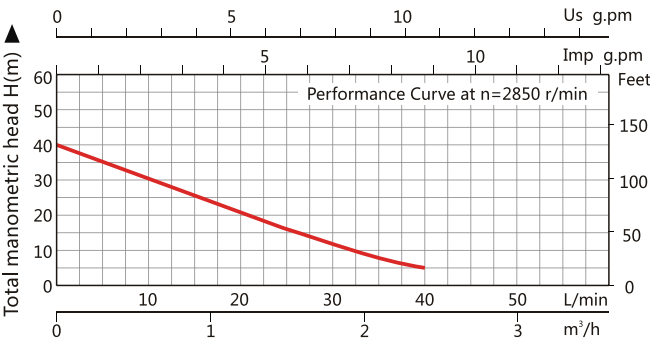

1. BA3 2. LK-60 3. LK-70 4. LK-80 5. PM-45 6. PM-60 7. PM-80

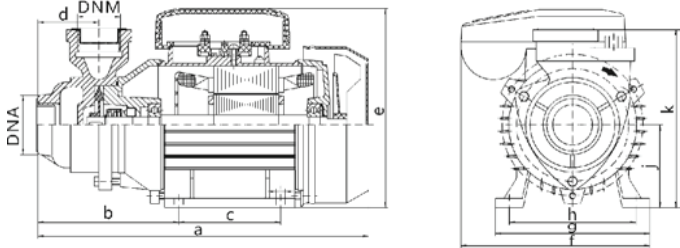

Technical Data (220~240V/50HZ)

Model	Single-phase Motor				n=2850r/min		
	Input max kW	Output Power		Current A	Q.max L/min	H.max m	Suct.max m
TE50	0.50	0.37	0.50	2.50	40	40	9

Other voltages and frequencies available on request.

Overall & Installation Dimensions

Model	DIMENSIONS(mm)																PACKAGE DIMENSIONS & G.W.				
	DNA		DNM		a	b	c	d	e	f	g	h	i	j	k	l	m	A	B	H	kg
	Inch	mm	Inch	mm																	
TE50	1"	25	1"	25	260	115	80	51	156	150	120	98	9	63	143	-	-	310	165	185	5.8

