

TSK500

Series Submersible Pump

Operating Conditions

- Liquid temperature up to 60°C
- Ambient temperature up to 40°C
- Total suction lift up to 9 m
- Continuous duty

Construct

PUMP

- Pump Body: Cast Iron
- Impeller: Cast Iron
- Mechanical Seal: Carbon / Ceramic / Stainless Steel


MOTOR

- Single Phase
 - Heavy Duty Continuous Work
 - Motor Housing: Aluminum
 - Shaft: Carbon Steel / Stainless Steel
- Insulation: Class B / Class F
Protection: IP68
Cooling: External Ventilation

Technical Data (220~240V/50HZ)

Model	Single-phase Motor			n=2860r/min				PACKAGE DIMENSIONS & G.W.					
	Outlet Dimeter mm	Power		Current	Voltage	Max.flow	Max.head	A	B	H	kg	A (mm)	
TSK 500	50	0.5	**	**	220/50	210	12	**	**	**	**		

Other voltages and frequencies available on request.

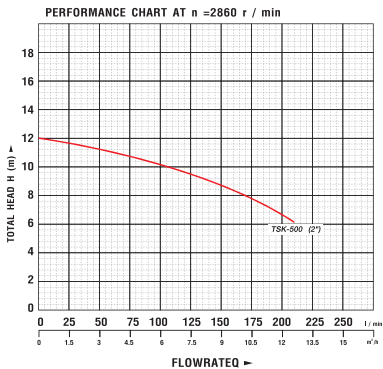

TSK750B

Series Submersible Pump

Construct

PUMP

- Pump Body: Cast Iron
- Impeller: Cast Iron
- Mechanical Seal: Carbon / Ceramic / Stainless Steel

MOTOR

- Single Phase
 - Heavy Duty Continuous Work
 - Motor Housing: Aluminum
 - Shaft: Carbon Steel / Stainless Steel
- Insulation: Class B / Class F
Protection: IP68
Cooling: External Ventilation

Technical Data (220~240V/50HZ)

Model	Single-phase Motor			n=2860r/min				PACKAGE DIMENSIONS & G.W.					
	Outlet Dimeter mm	Power		Current	Voltage	Max.flow	Max.head	A	B	H	kg	A (mm)	
TSK 750B	75	0.75	**	**	220/50	250	18	**	**	**	**		

Other voltages and frequencies available on request.

